

Longlight 5 - 25°

Longlights are bands of VELUX modular skylights, supplied with installation brackets and clamps that guarantee a fast and secure installation. The pre-fabricated flashing allows for configurations with a pitch of 5 to 25°.

Longlights are mounted on a standard steel profile of 100 mm width (not a VELUX component). The brackets are fixed with a claming system holding the skylights in place. It is also possible to install the mounting brackets of a longlight directly onto a wooden batten without using the clamps.

Sub-construction
for Longlight at
velux.co.uk/modularskylights

Use the table to define module height (H) and/or installation pitch (α).

Example:
A = 2500 mm

Result:
α1: **H** = 2400 mm at installation pitch of **5°**
or
α2: **H** = 2600 mm at installation pitch of **23.5°**

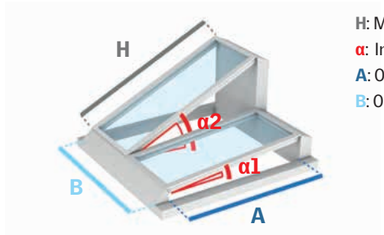

H: Module height
α: Installation pitch
A: Opening width
B: Opening length

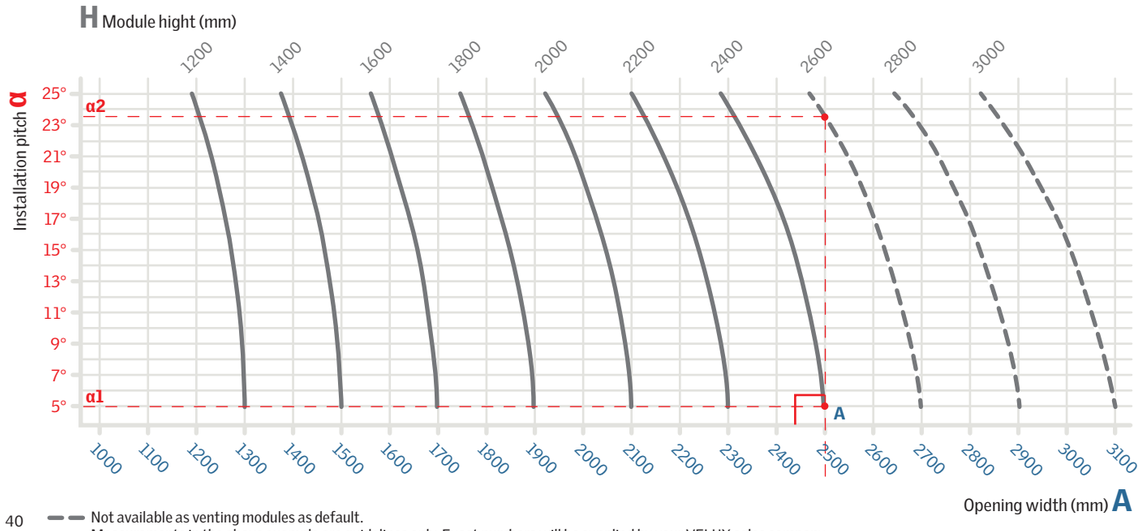

Not available as venting modules as default.
Measurements in the above example are guidelines only. Exact numbers will be supplied by your VELUX sales company.

Sectional Drawings

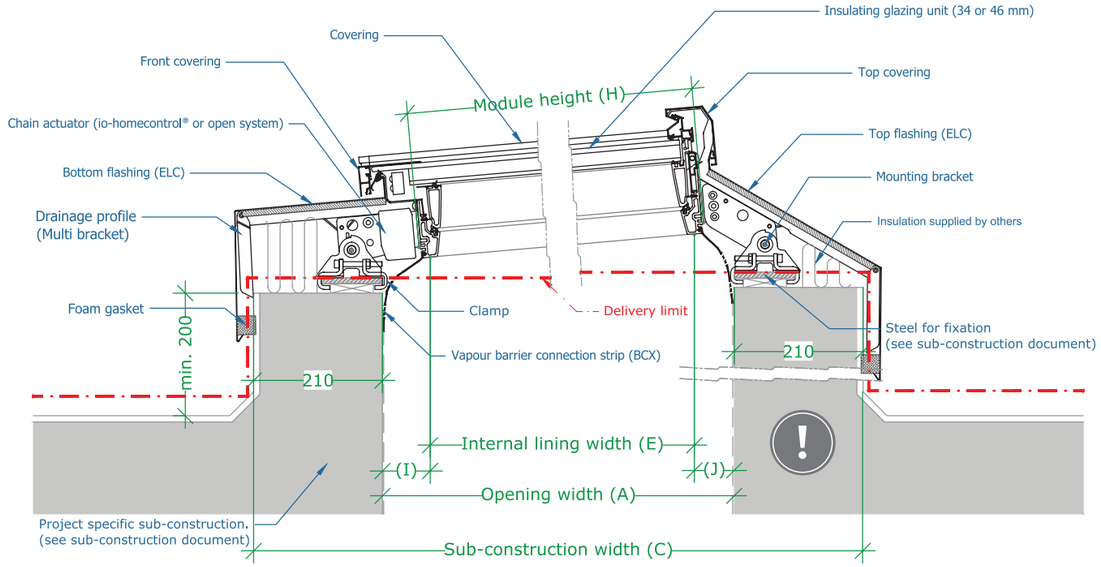

Cross section - bottom

Cross section - top

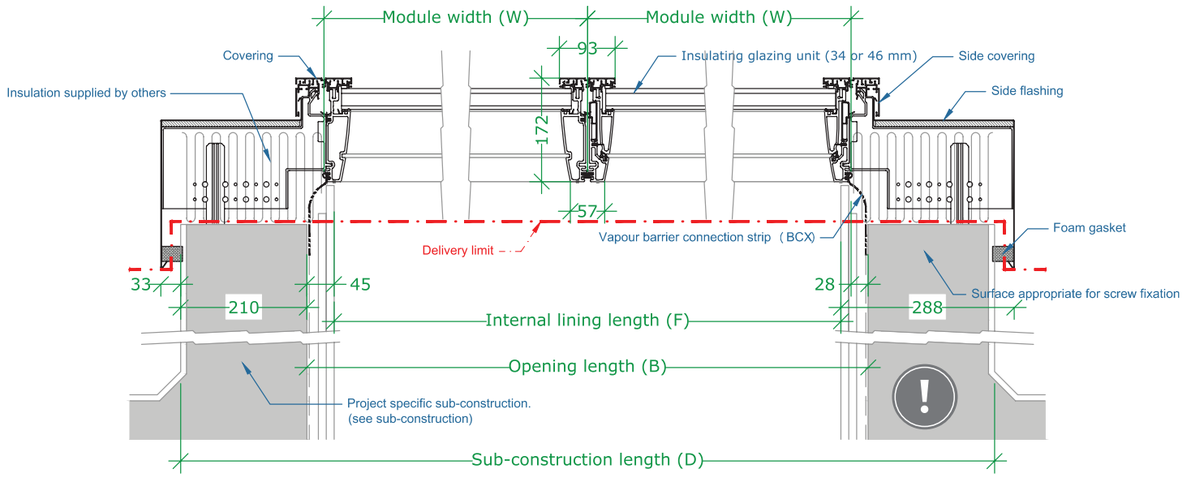

Longitudinal section